


Distance between gate and hinge post	A
Width of Left Gate	B
Distance between gates	C
Width of Right Gate	D
Distance between gate and hinge post	E
Total distance between posts	F

**DOUBLE CAPE COD
RAIL GATES
(4 FOOT & 8 FOOT WIDE 46"
HIGH GATES WITH 74" STILE)
REAR EYE HINGES
(Product Codes #8324)
GATE HUNG BETWEEN POSTS**


Hardware Required								
	Galvanized Finish	Black Powder Coat over Galvanized Finish	Rear Eye Hinge Advantages					
Hinge Sets	1 of 8324-122 & 1 of 8324-S242	1 of 8324-12P and 1 of 8324-S24P	Opens 180 degrees Incredible amount of adjustment Easy operation & Very Strong Minimal distance between gate and post					
fasteners included with hardware	Two Sets Includes							
	two 12" double strap (8324-122 or 8324-12SP) & two 24" double strap (8324-242 or 8324-24SP) four mounting plate with 8" adjustable threaded pins(8256-342 or 8256-34P)							
Cane Bolt (Vertical)	1 or 2 of 5000-242*	1 or 2 of 5000-24SP*						
Central Latch Options			Dimensions (feet and inches)					
			A	B	C	D	E	F
Throw Over Gate Loop	4200-032	4200-03SP	1"	4'	1"	8'	1"	12' 3"
Cane Bolt and Keep	5000-122 plus 5000-002	5000-12SP plus 5000-00SP	1"	4'	1"	8'	1"	12' 3"
Lumber Required								
Posts	2 of 10' x 6" x6" (usually dressed out at 5.5" x 5.5")							
	Rails, Stiles (uprights) and Diagonals made from full 1" thick by 5.5" wide lumber (commonly stocked decking material or rough cut lumber)							
Rails	6 of 8' x 1" x 5.5"							
Stiles	6 of 8' x 1" x 5.5"							
Diagonals	2 of 8" x 1" x 5.5" and 2 of 10' x 1" x 5.5"							
Filler blocks for bottom hinge	3 of 12' x 1" x 5.5" (Parts E,F,G and H on Plan Layout)							
Fasteners Required								
Approximately 100 of 1.75" x #8 wood screws (stainless preferred)								
30 of 3.5" x 3/8" carriage bolts (hot dipped galvanized or stainless steel), nuts, and washers								
Mounting Plate Fasteners - 20 of 3/8" carriage bolts that are 1" longer than thickness of gate post (preferred) or 20 of 3/8" lag bolts (minimum of 4" long)								
*One 24" Cane Bolt (5000-242 or 5000-24SP) is required for central stability. Two are needed if you require a means of keeping the gates open.								

Hoover Fence Company




Download includes this materials list, component cutting and layout sheet, tips on installing gate posts, and detailed instructions.
For a complete listing of our free gate plans and gate layouts visit hooverfence.com.

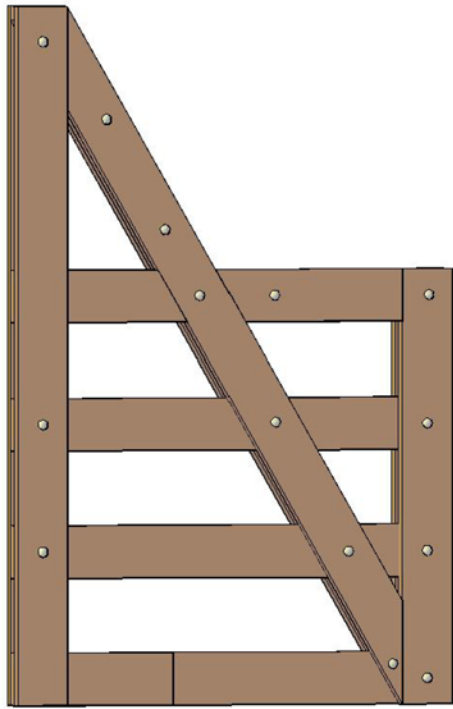





FLAT FRONTAL VIEW

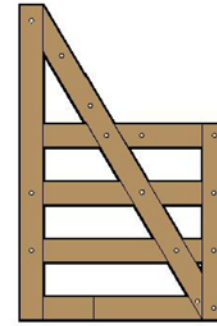


THREE LAYERS

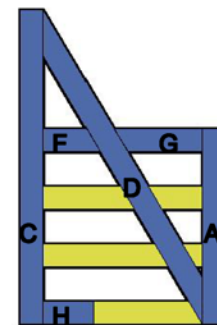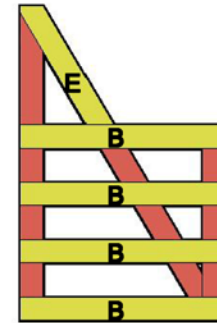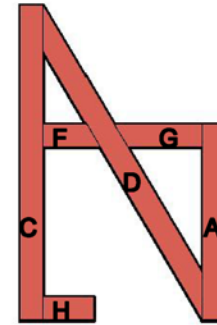


COMPONENTS (FULL 1" THICK x 5-1/2" WIDE)

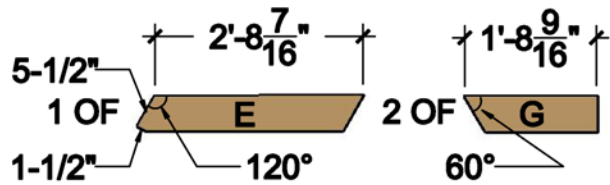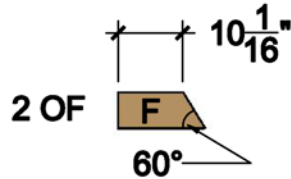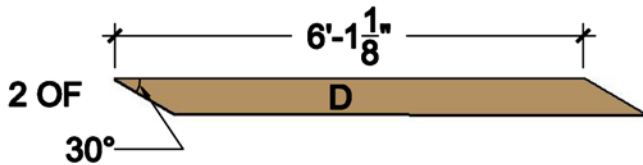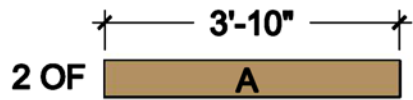


Hoover Fence Company
4' Cape Cod Board Gate

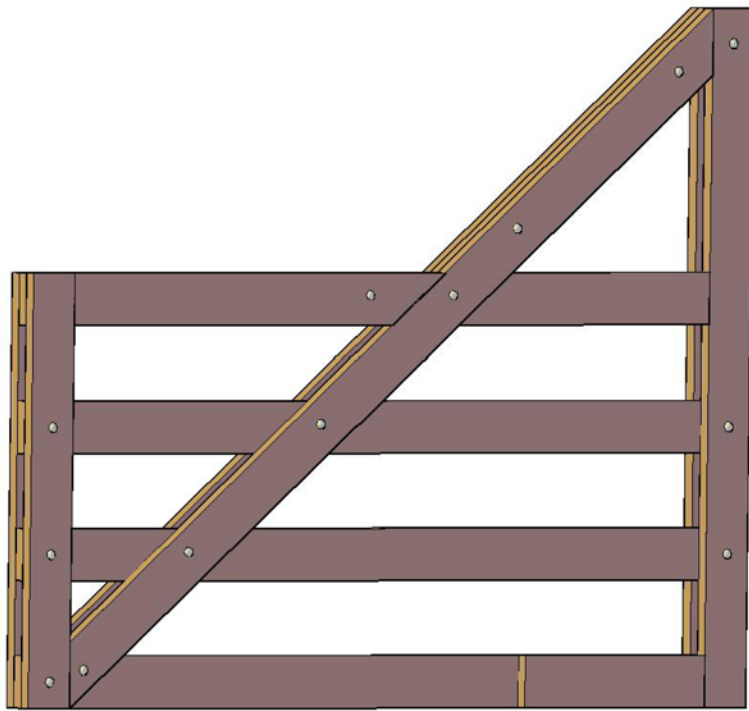







FLAT FRONTAL VIEW

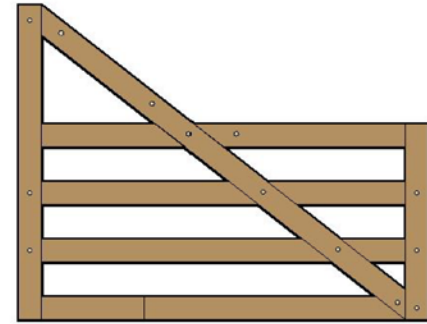

THREE LAYERS

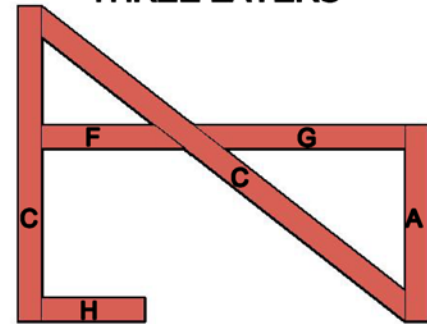

COMPONENTS (FULL 1" THICK x 5-1/2" WIDE)

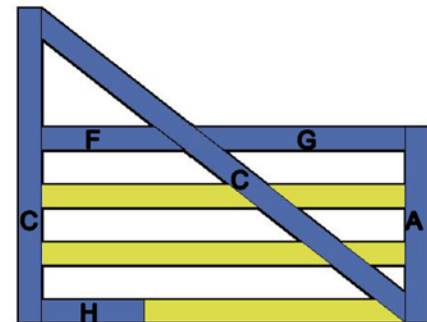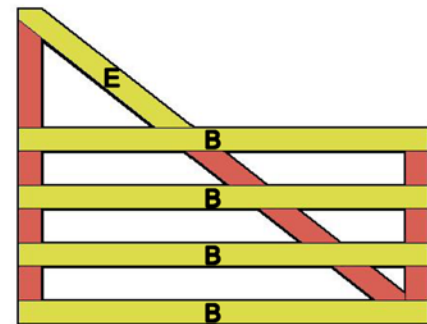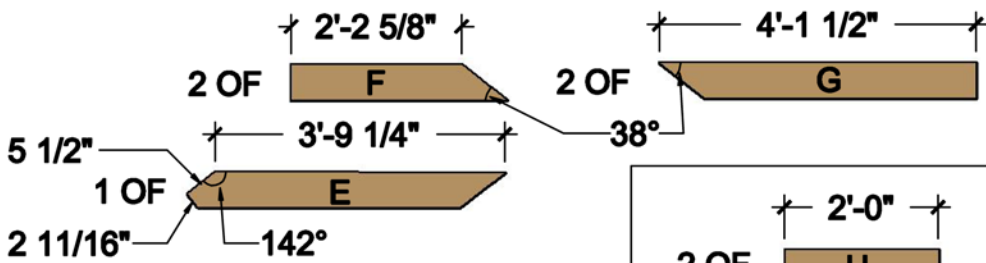

Hoover Fence Company
8' Cape Cod Board Gate